



























# CCS11 « BASIC » Program

Reference :25968


		Functioning
<b>SWITCHING ON SYSTEM</b>	<ul style="list-style-type: none"> <li>Pressing any button activates the system</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button automatically switches off the system</li> </ul>	
<b>AUTOMATIC SWITCH OFF</b>	<ul style="list-style-type: none"> <li>The system automatically switches off if the voltage drops under 11.5V</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°1.</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°2.</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°3 and the command output connected to the ground « Addition to Aux 3 ».</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°4 and the command output connected to the ground « Addition to Aux 4 ».</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°5.</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°6</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°7</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°8.</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°9</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°10</li> </ul>	
	<ul style="list-style-type: none"> <li>Pressing this button once activates the AUXILLIARY Output N°11.</li> </ul>	
	<ul style="list-style-type: none"> <li>A power output is available once the system is activated to provide power for a radio connection.</li> </ul>	

## LOW BATTERY ALARM




The low battery alarm goes off when the threshold drops below a level of 11.8 volts (12 volt vehicles) or a level of 23.6 volts (24 volt vehicles).

# Equipment Wiring diagram

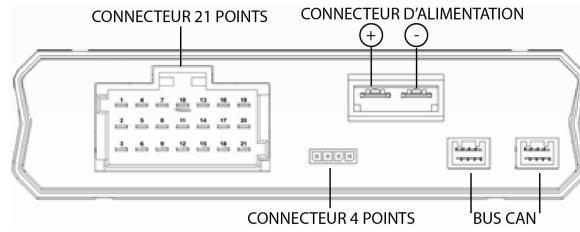

AUXILLIARY 1		15A	15 (+) 12 (-)
AUXILLIARY 2		15A	21 (+) 18 (-)
AUXILLIARY 3		3A	1 (+) 2 (-)
AUXILLIARY 4		3A	4 (+) 5 (-)
AUXILLIARY 5		3A	7 (+) 8 (-)
AUXILLIARY 6		3A	13 (+) 14 (-)
AUXILLIARY 7		3A	16 (+) 17 (-)
AUXILLIARY 8		3A	19 (+) 20 (-)
AUXILLIARY 9		3A	3 (+) 2 (-)
AUXILLIARY 10		3A	6 (+) 5 (-)
AUXILLIARY 11		Masse -0,1A	11 (-)
6A Power supply (> RADIO)		6A	9 (+) 8 (-)
AUXILLIARY 4 (ground connection limited to 100mA)		Masse -0,1A	10 (-)



21 PIN CONNECTOR