


Emergency Light Arrow - 15 lights

Article number : 30803

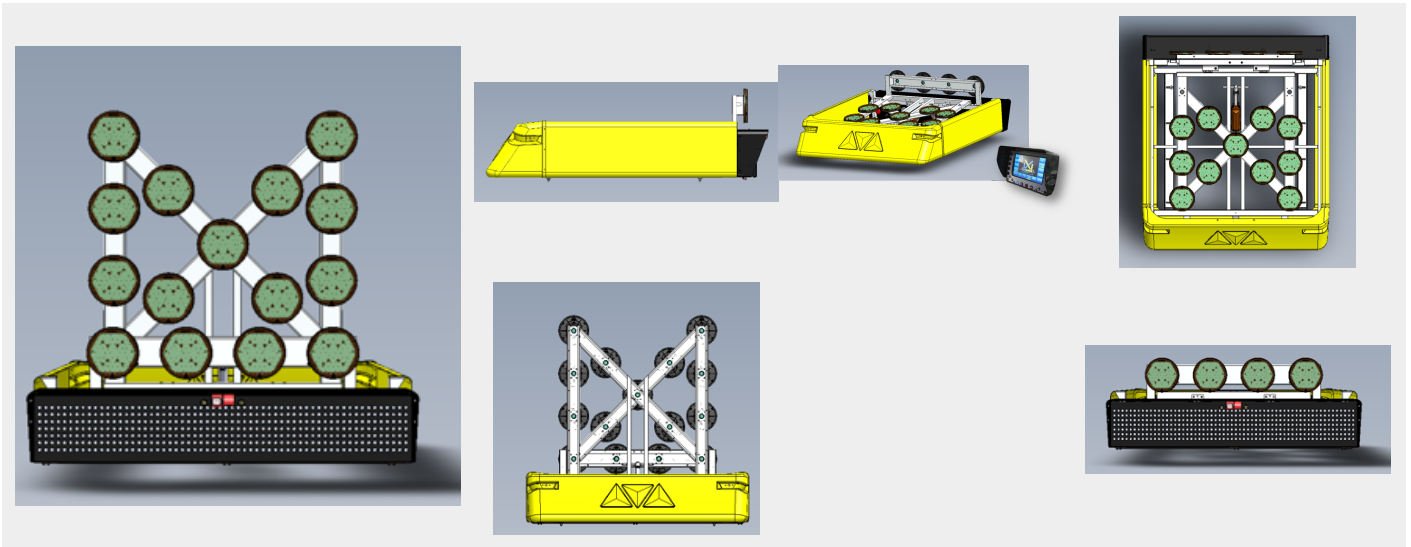

Advantages:

- Aluminium unit: light, strong, corrosion-resistant and recyclable - Compact sized unit - Graphic screen control - Light power and Mercura quality - Safety, very low wind resistance - Features: left and right arrow, cross and scrolling (with option KR41)

Technical specifications:

- **Frame:**

- All frames and protective casings are made of aluminium - The deflectors and casings of the units are painted with automotive paint. The following colours are available as standard: Amber (RAL 2000), White (RAL 9016), Yellow (RAL 1016), Fire brigade red (RAL 3000). Consult us for more colour options.

- **Arrow:**

- Power supply 12 V or 24 V - 15 x 200 mm LED lights - 200 mm lights compliant with NF EN 12352

- Light specifications

- Light dimensions: 225 x 55 mm - Weight: 400 g - 70 high intensity LEDs: amber C1 + C2 - Certification: EN 12352 - compliant with the standard L8H - Class C1 - F2 - O1 - M2 - 12 V model consumption: 0,6A fixed and 0,3A flashing - 24 V model consumption: 0,23A fixed and 0,11A flashing - Light power in candelas: 2100Cd (required standard minimum: 1500Cd) - Operating temperature: -40°C to +85°C - Raised by an electric jack - Day/night adjustment of light intensity

Options:

- KR41 pre-warning lightbar (4 x 200 mm LED lights) for scrolling
- 200 mm Variable Message Panel - dimensions: 1558 x 294 x 200 mm
- Amber Gyroled Class 1 or Class 2, rotating or flashing - R65 approved