


Gyroled M80 Class 1

13 flashing patterns, modifiable in few seconds!

Article number : 30577

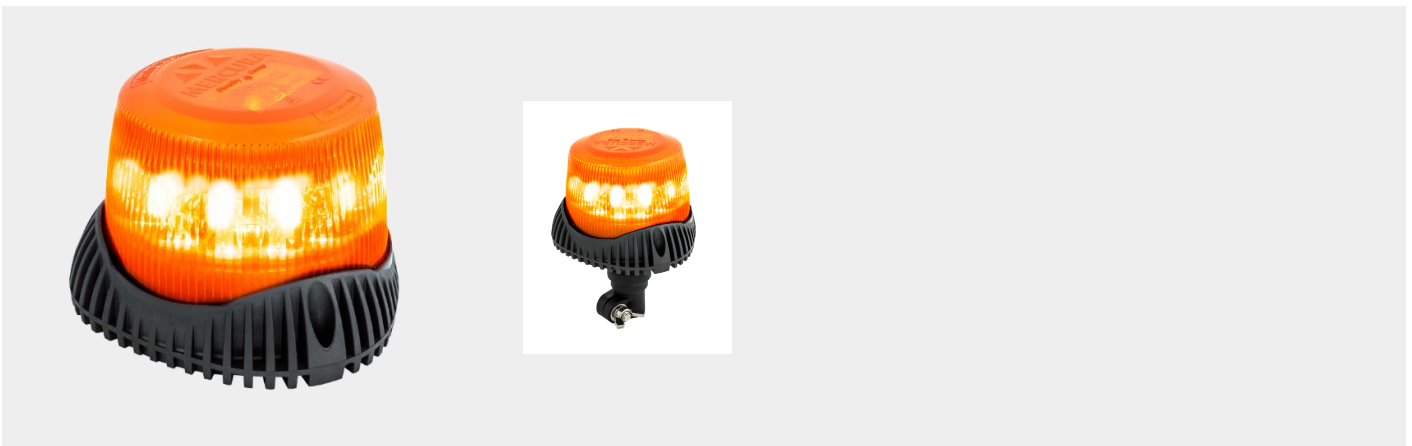

Advantages:

- LED beacon, R65 and EMC approved
- Sold in batch - economical price
- Intended for first assembly
- High brightness R65 Class 1 approved
- 13 flash patterns available programmable by the user (by default, product delivered in rotating mode)
- Plastic base for better heat dissipation

Technical specifications

- 13 flash patterns
- Polycarbonate dome
- Power supply: 11 W maximum
- Protected against polarity reversals
- Guarantee period: 3 years

Approvals

PHOTOMETRY: R65 Class 1 approval **PROTECTION RATINGS:** Impermeability: IP45 - Protection from mechanical impacts: IK08 **EMC:** « E » Marking Regulation R10 N° E2 10R05 16242 CISPR25 (2008): class 4 or 5 radiated

Mounting	Code
ISO	30577
PIPE MOUNT	30582
Magnetic with cigare lighter plug	31653

Lens	Polycarbonate
Colour LEDs	White
Colour lens	Amber
No. of LEDs	8
Flash Patterns	13 flash patterns
Mounting	Surface Mount, Pedestal, Magnetic, ISO-base
Voltage	10-30V
Consumption	900mA depending on the flash pattern
Diameter	ISO: 134 mm PIPE MOUNT: 134 mm MAGNETIC: 134 mm
Weight	ISO: 0.450 kg PIPE MOUNT: 0.585 kg MAGNETIC: 0.750 kg
Length	For the magnetic version: spiral cord, minimum length 50cm, maximum 3m
Height	ISO: 96 mm PIPE MOUNT: 176 mm MAGNETIC: 105 mm
Operating temperature	-40°C to +85°C
Enclosure rating	IP 45 IK 08
Approval	ECE R65 I, ECE R10