




## 200 mm Light L8H

For emergency light arrows

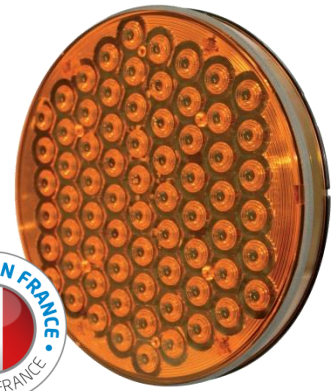

- 70 high intensity LED : amber C1 + C2
- Dimensions : 225 x 55 mm - Weight : 400 gr
- Certification : **EN 12352** - compliant with the L8H standard
- 12V model consumption : 0,6A fixed / 0,3A flashing
- 24V model consumption : 0,22A fixed / 0,11A flashing
- Protection against saline mist
- Bi-signal kit : Electronic unit - Synchronised or alternating lights (to be specified)



Designation	Code
Bi-signal 200 (2 lights + 1 unit) 12V	17068
Bi-signal 200 (2 lights + 1 unit) 24V	23872
200 mm LED light - 12V	27961
200 mm LED light - 24V	24985